

FIG. 1

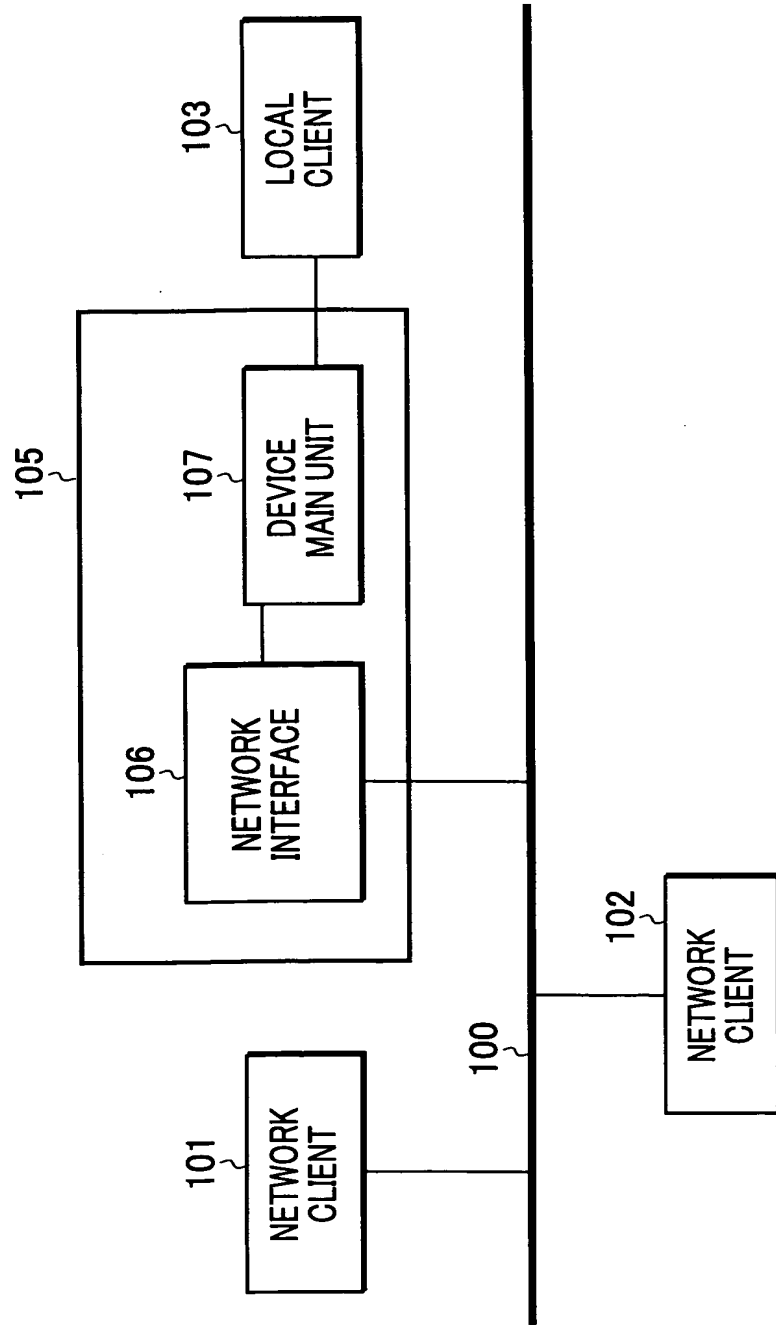


FIG. 2

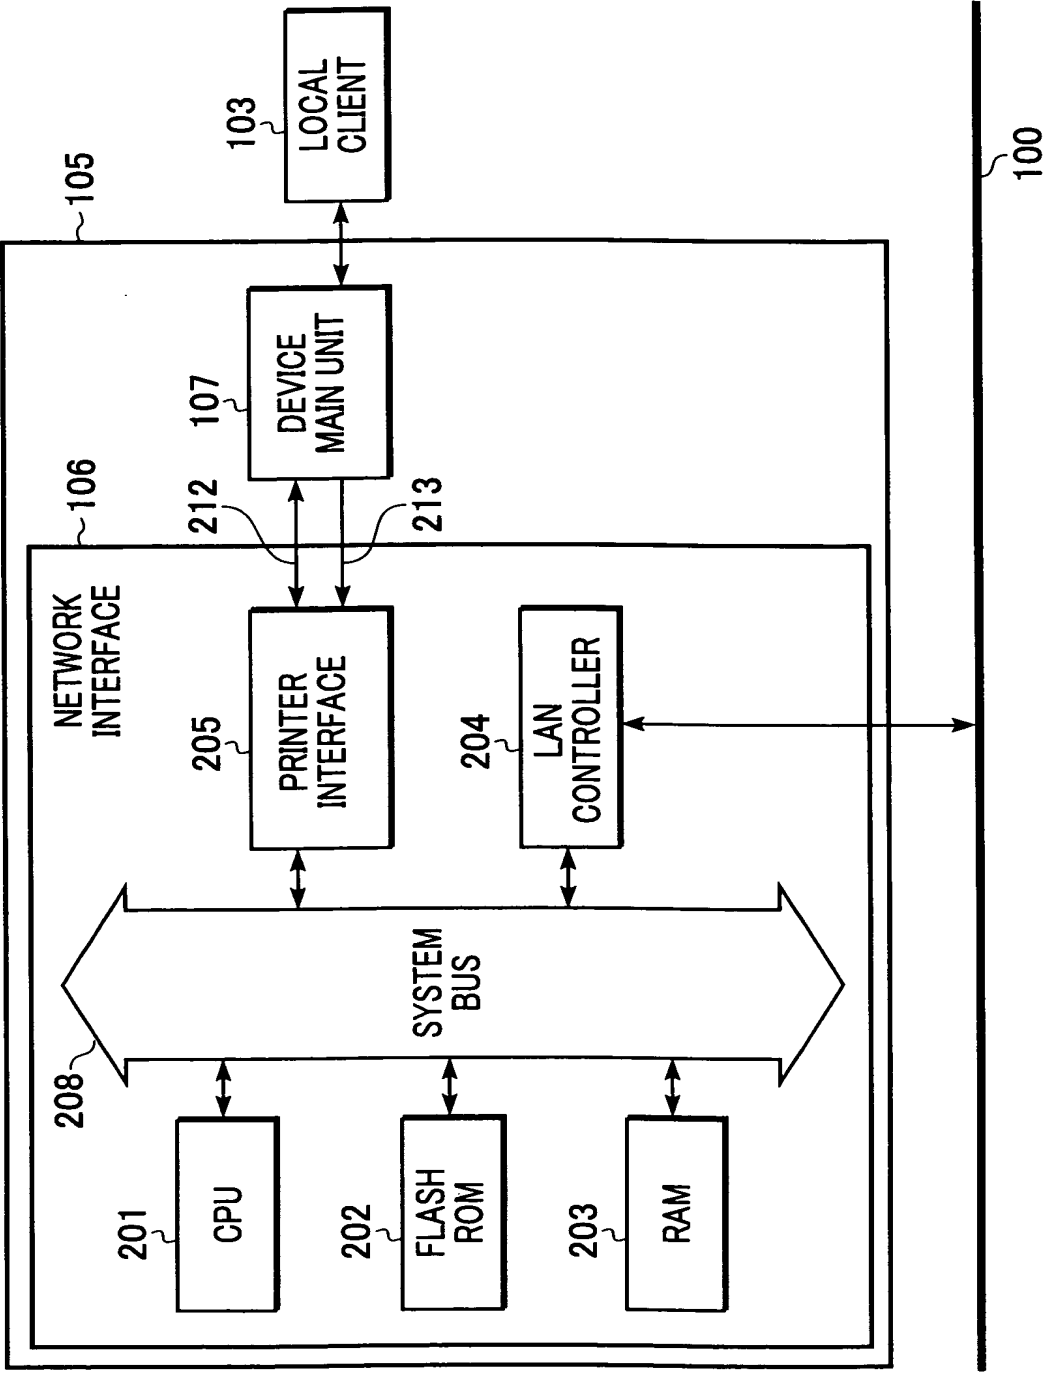


FIG. 3A

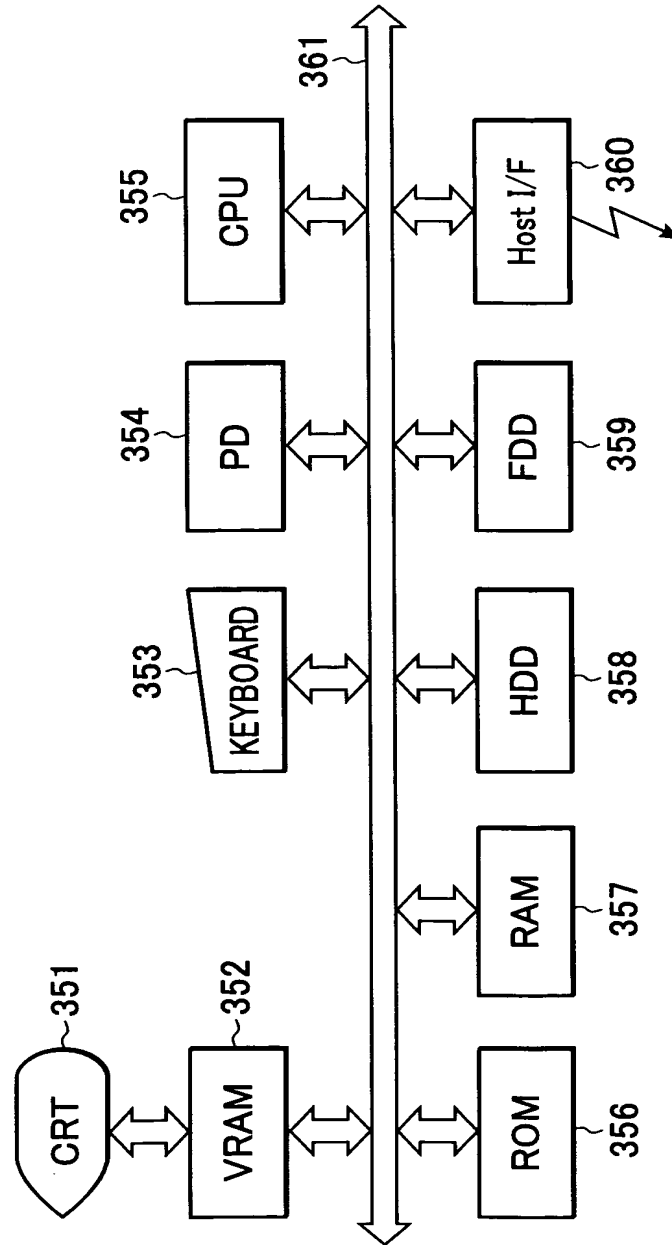


FIG. 3B

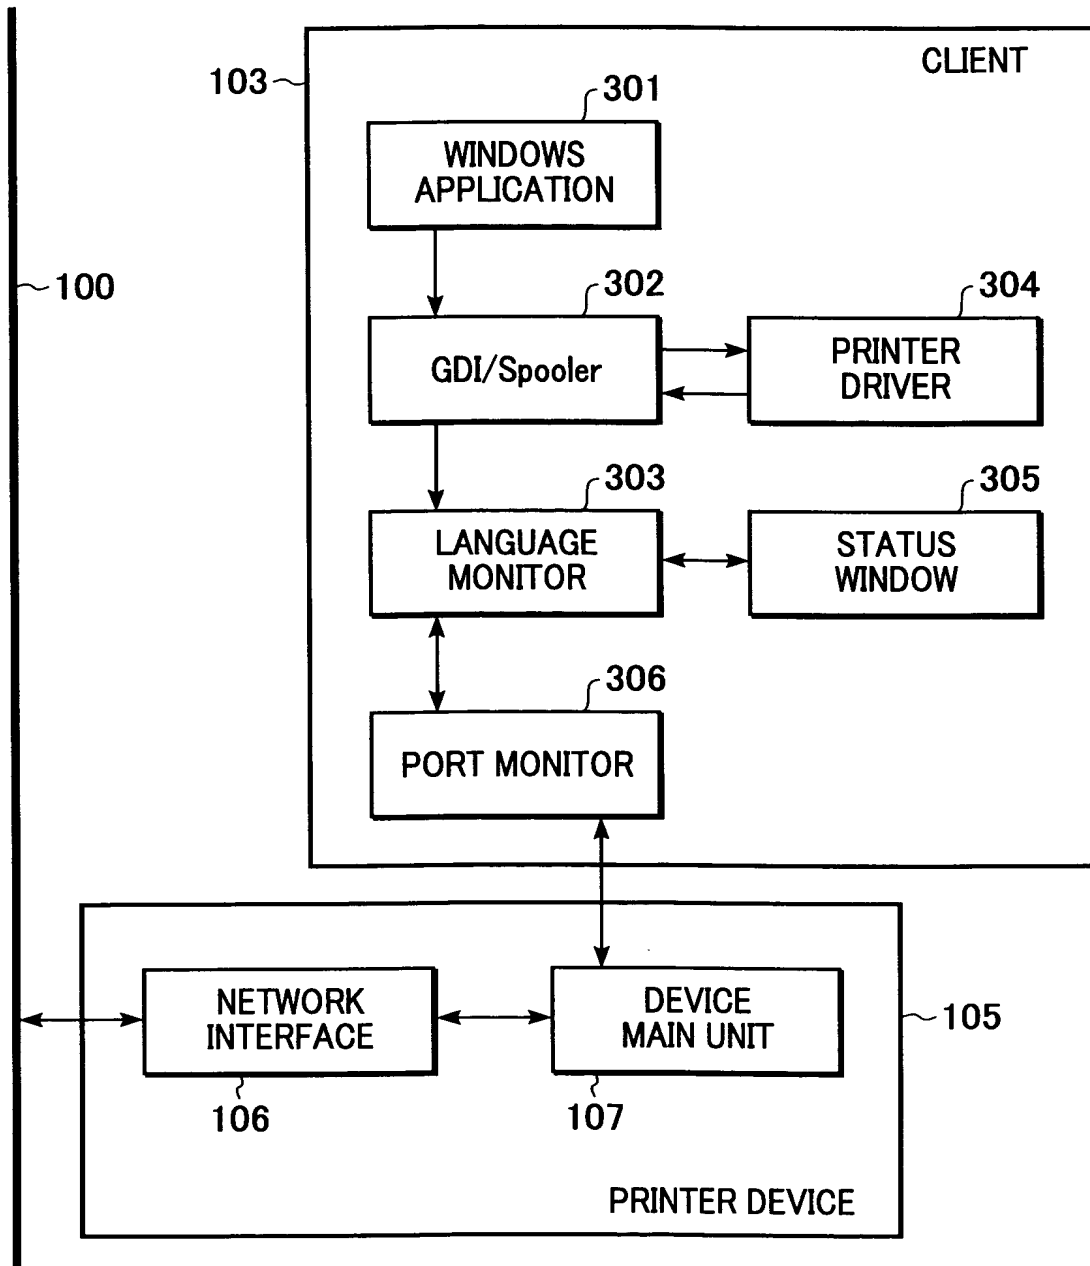


FIG. 4

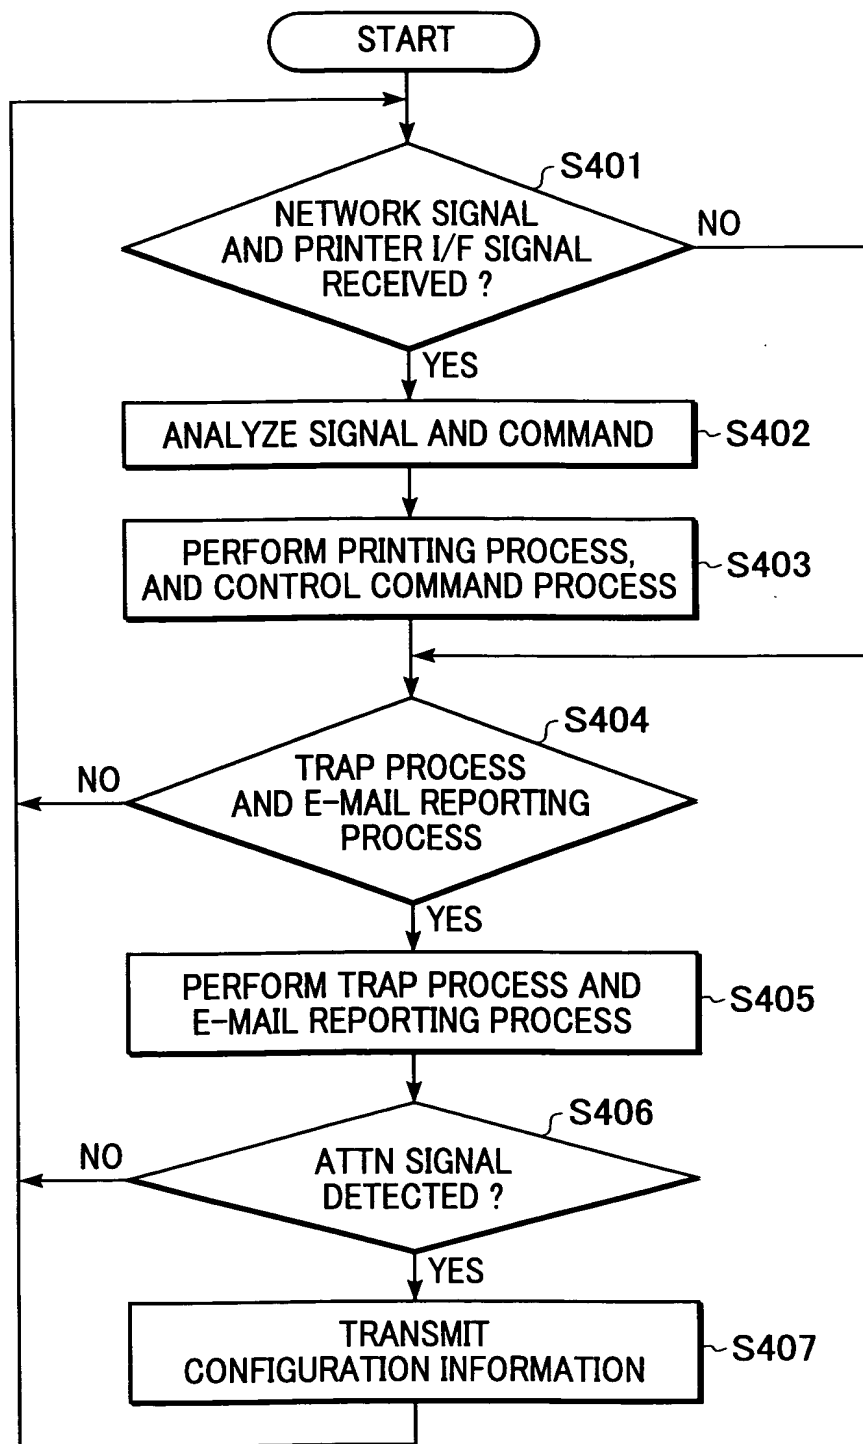


FIG. 5

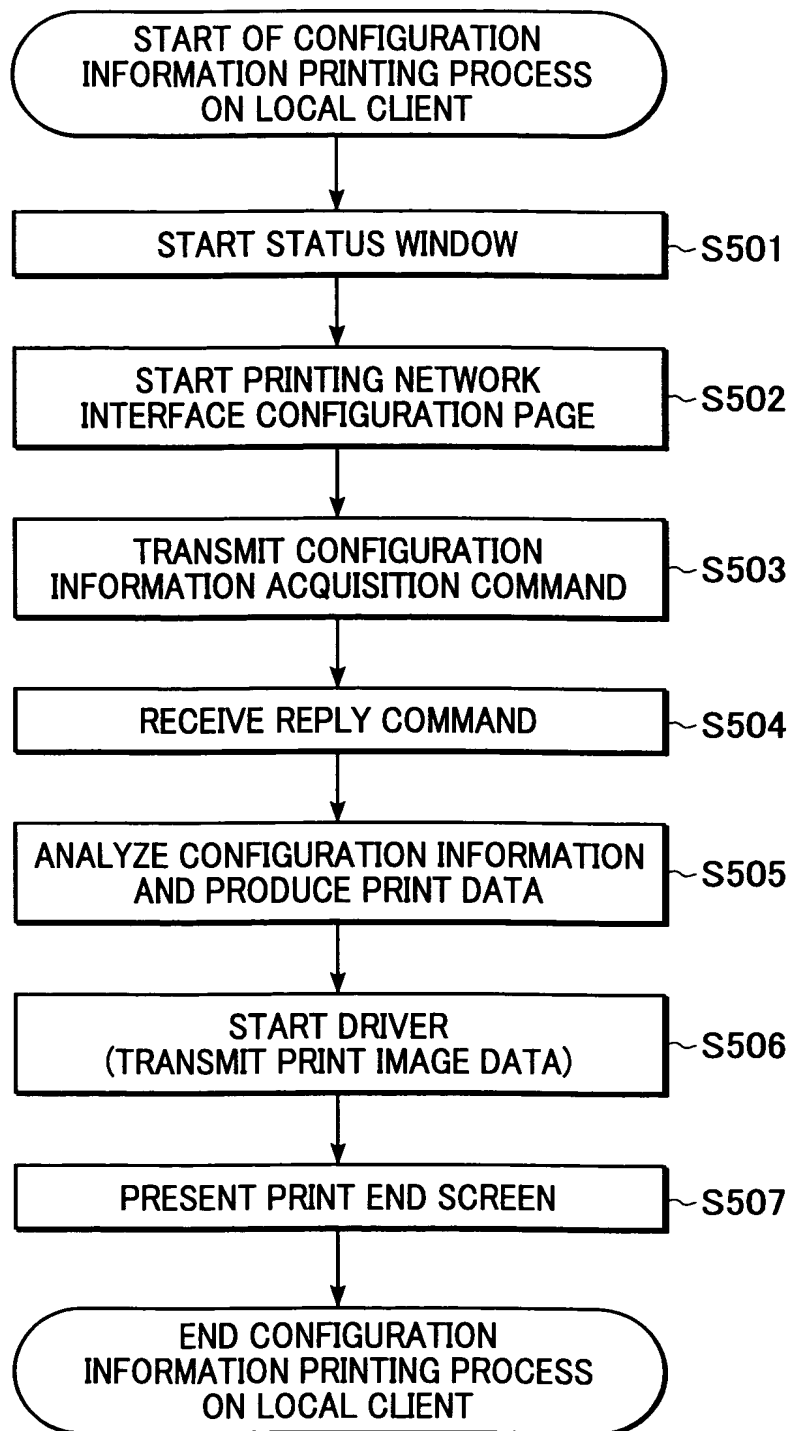


FIG. 6

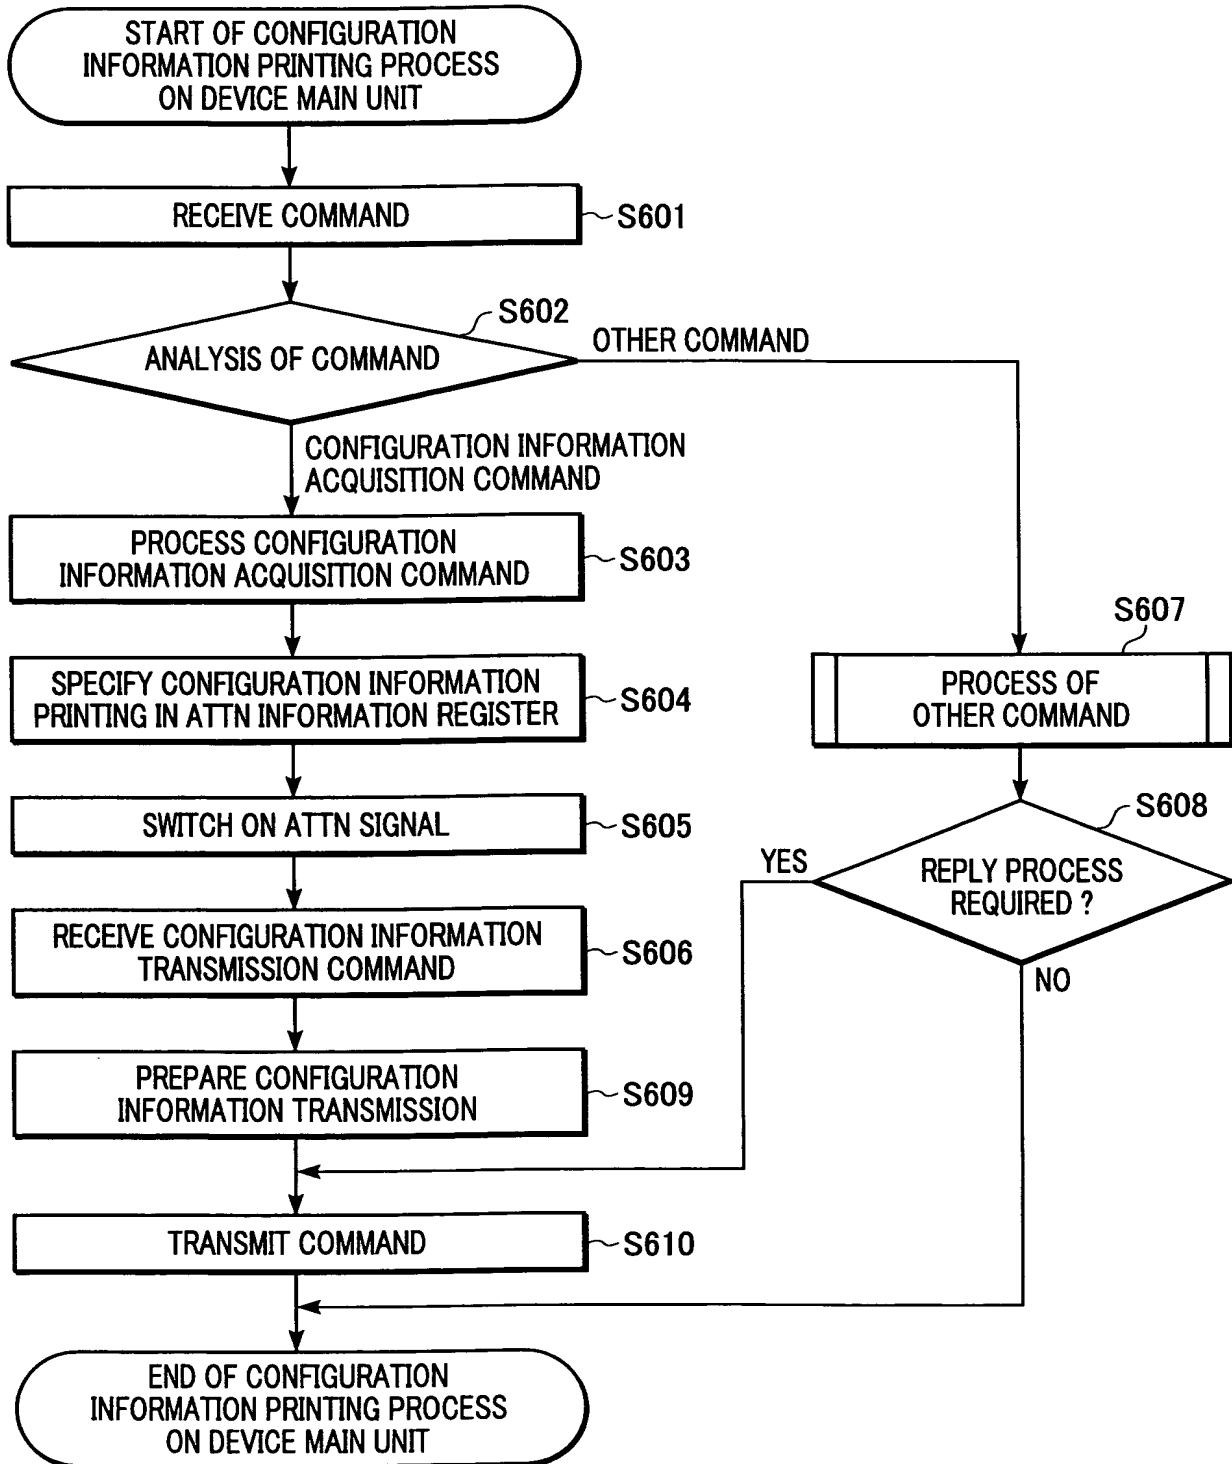


FIG. 7

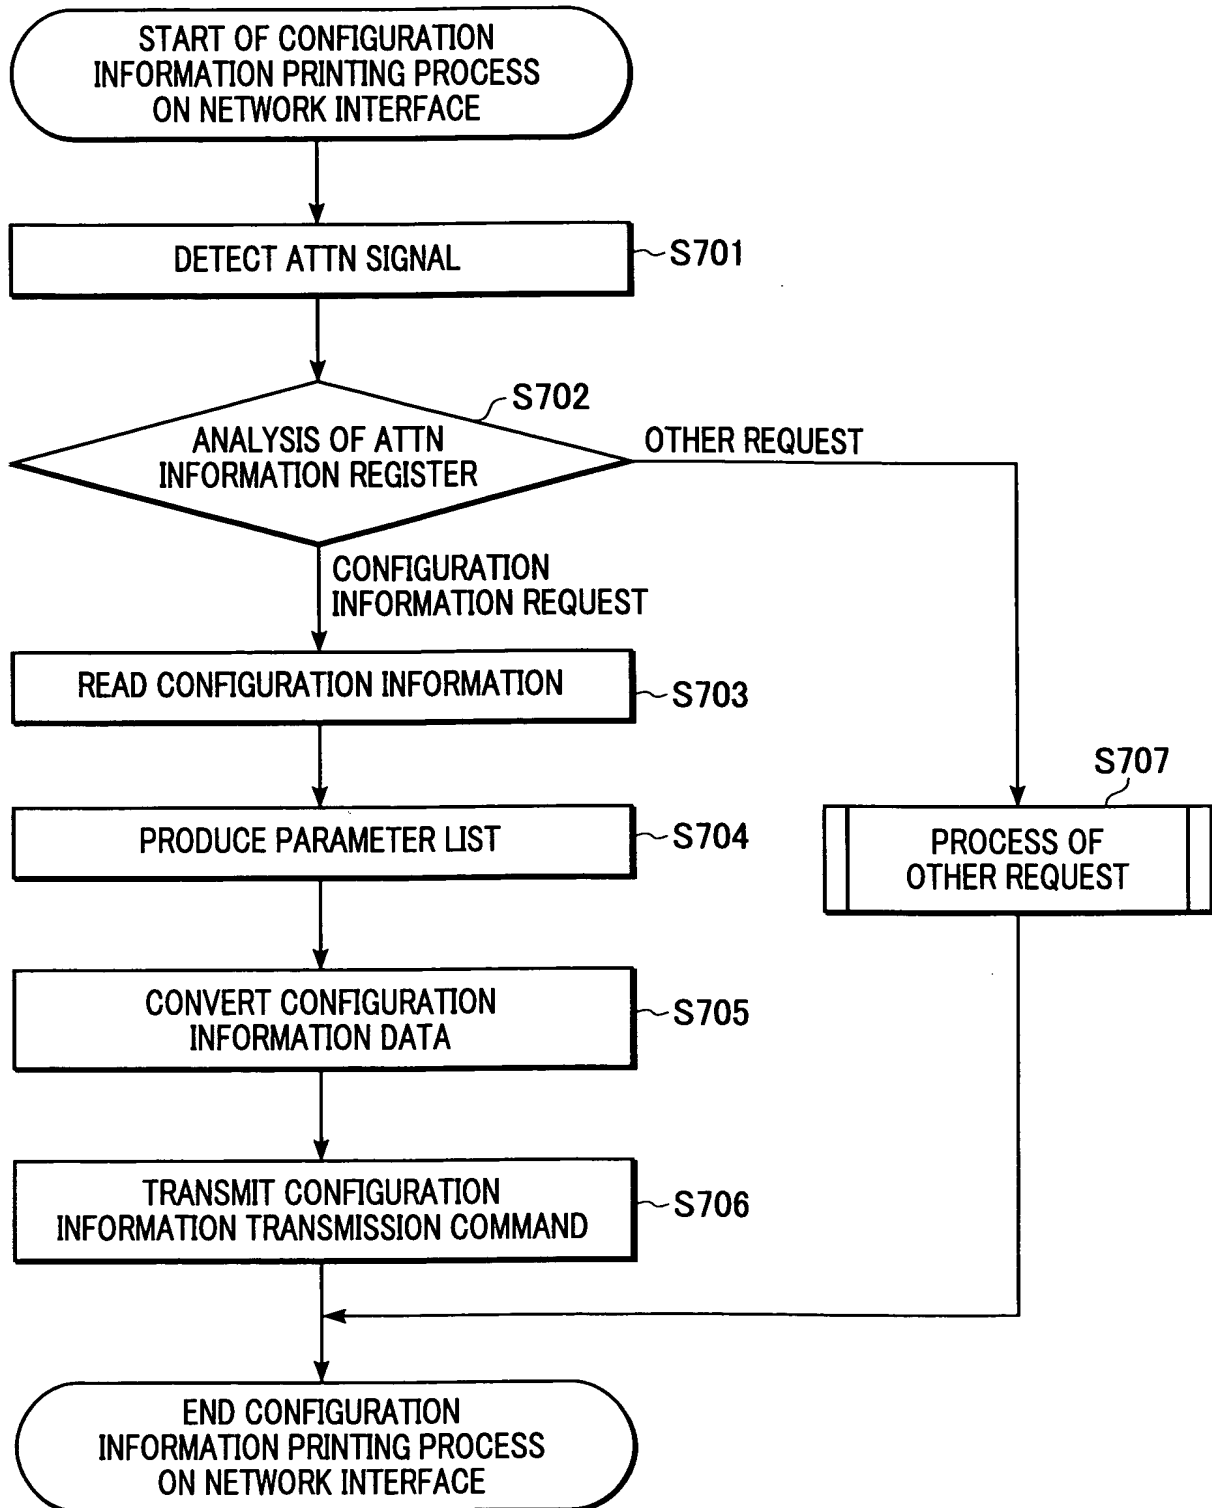


FIG. 8

MODEL NAME OF NETWORK ADAPTOR : NB-XX

#-----

MODEL NAME : LASER SHOOT P-XXXX

ACTIVE LANGUAGE : ENGLISH

CAPT I/F VERSION : 2.01

INTERFACE : Fast Ethernet 10/100 BaseT

DATA RATE : 10/100 Mbps

MAC ADDRESS : 00 : 00 : 85 : XX : XX : XX

FIRMWARE VERSION : 1.00 beta

CANON-MIB VERSION : 2.50

GENERAL INFORMATION

PRINT SERVER NAME : OANON112008

TCP/IP

TCP/IP : Enabled

IP ADDRESS : 192. 168. 3. 215

SUB-NETMASK : 255. 255. 255. 0

GATEWAY ADDRESS : 192. 168. 3. 1

DHCP : OFF

BOOTP : OFF

RARP : OFF

DNS SERVER ADDRESS : 192. 168. 3. 2

DNS SERVER DYNAMIC UPDATING : OFF

DNS HOST NAME : OANON112008

DNS DOMAIN NAME : oanon.co.jp

SMTP SERVER NAME : smtpsvr.oanon.co.jp

WINS SERVER ADDRESS : 192. 168. 3. 3

SCOPE ID : AAAAAAAAAA.BBBBBBBBBB.CCCCCCCCCC

SNMP ACCESS : ON

COMMUNITY CHARACTER STRING : smtpsvt.oanon.co.jp

NTP SERVER NAME : 192. 168. 3. 4

NetBIOS

BASE PROTOCOL : NetBEUI

TCP/IP PRINT LIMITATIONS

PRINT LIMITATION : ON

PRINT LIMITATION MODE : PRINTING FROM DESIGNATED
ADDRESS PERMITTED

PRINT LIMITATION DESIGNATING ADDRESS :

⋮

TCP/IP SETTING LIMITATIONS

SETTING LIMITATION : ON

SETTING LIMITATION MODE : SETTING FROM DESIGNATED
ADDRESS DENIED

SETTING LIMITATION DESIGNATING ADDRESS :

⋮

[EOF]

FIG. 9

CONFIG PRINT		NB-XX
MODEL NAME	:	LASER SHOOT P-XXXX
ACTIVE LANGUAGE	:	ENGLISH
CAPT I/F VERSION	:	2.01
INTERFACE	:	Fast Ethernet 10/100 BaseT
DATA RATE	:	10/100 Mbps
MAC ADDRESS	:	00 : 00 : 85 : XX : XX : XX
FIRMWARE VERSION	:	1.00 beta
CANON-MIB VERSION	:	2.50
GENERAL INFORMATION		
PRINT SERVER NAME	:	OANON112008
TCP/IP		
TCP/IP	:	Enabled
IP ADDRESS	:	192. 168. 3. 215
SUB-NETMASK	:	255. 255. 255. 0
GATEWAY ADDRESS	:	192. 168. 3. 1
DHCP	:	OFF
BOOTP	:	OFF
RARP	:	OFF
DNS SERVER ADDRESS	:	192. 168. 3. 2
DNS SERVER DYNAMIC UPDATING	:	OFF
DNS HOST NAME	:	OANON112008
DNS DOMAIN NAME	:	oanon.co.jp
SMTP SERVER NAME	:	smtpsvr.oanon.co.jp
WINS SERVER ADDRESS	:	192. 168. 3. 3
SCOPE ID	:	AAAAAAAAAA.BBBBBBBBBB.CCCCCCCCCC
SNMP ACCESS	:	ON
COMMUNITY CHARACTER STRING	:	smtpsvt.oanon.co.jp
NTP SERVER NAME	:	192. 168. 3. 4
NetBIOS		
BASE PROTOCOL	:	NetBEUI
TCP/IP PRINT LIMITATIONS		
PRINT LIMITATION	:	ON
PRINT LIMITATION MODE	:	PRINTING FROM DESIGNATED ADDRESS PERMITTED
PRINT LIMITATION DESIGNATING ADDRESS	:	:
	:	:
	:	:
TCP/IP SETTING LIMITATIONS		
SETTING LIMITATION	:	ON
SETTING LIMITATION MODE	:	SETTING FROM DESIGNATED ADDRESS DENIED
SETTING LIMITATION DESIGNATING ADDRESS	:	:
	:	:
	:	:

FIG. 10

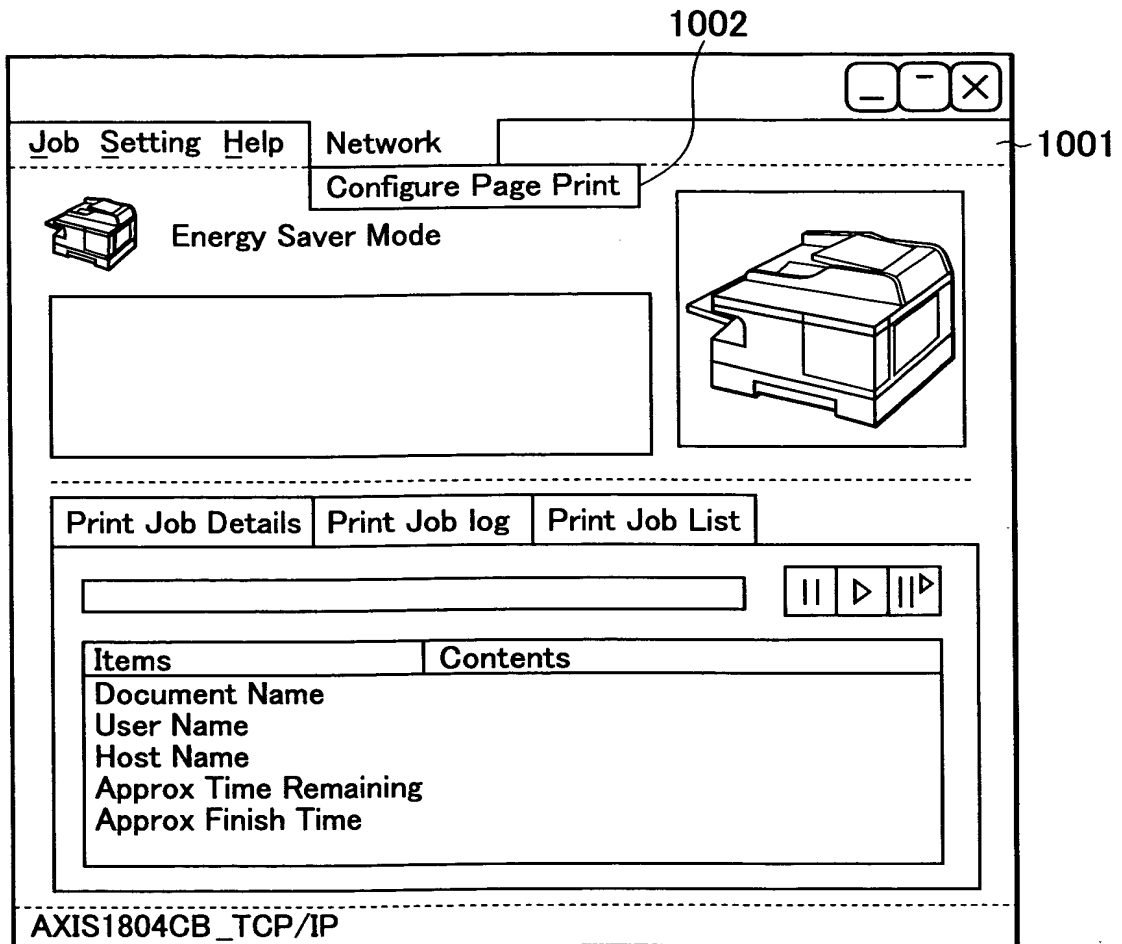


FIG. 11

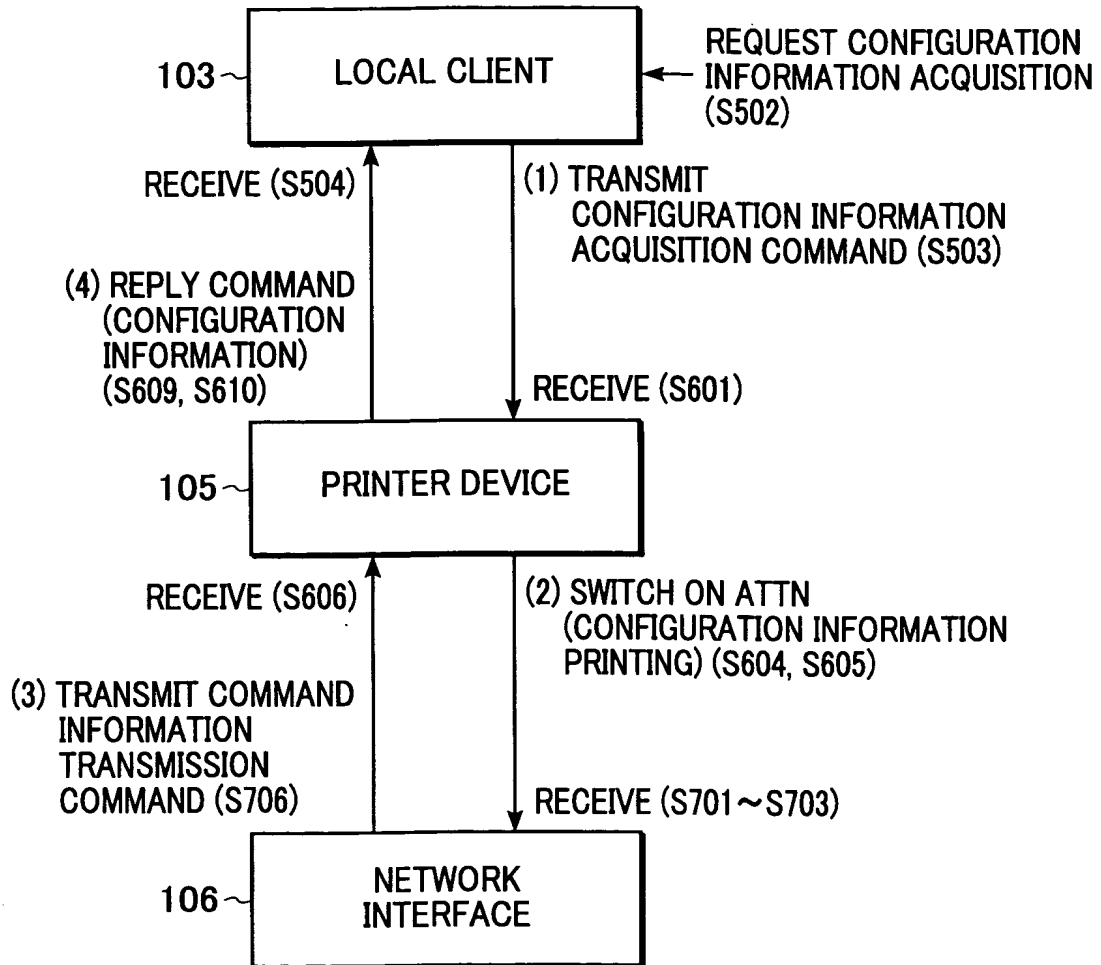


FIG. 12

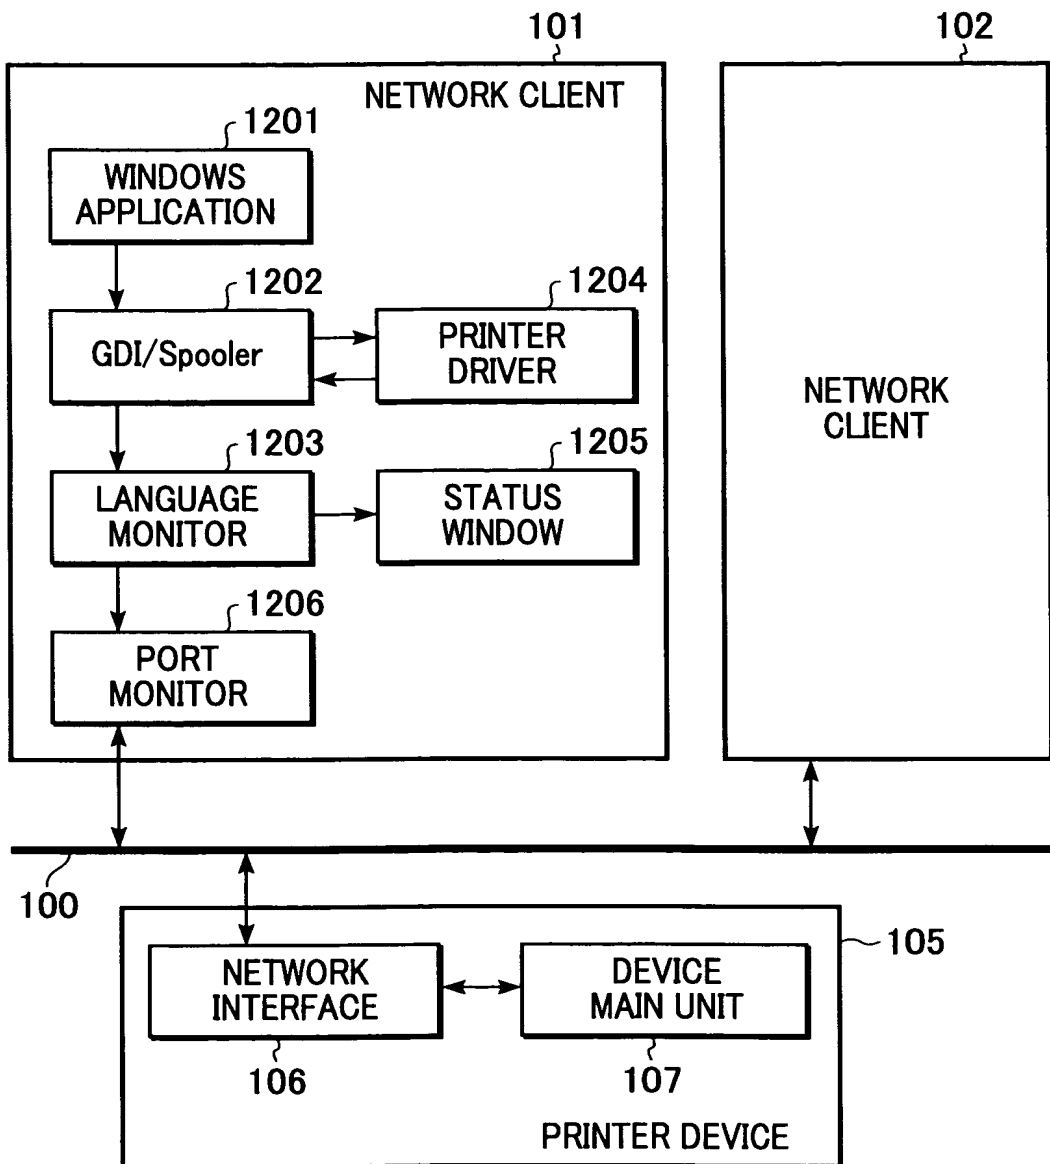


FIG. 13

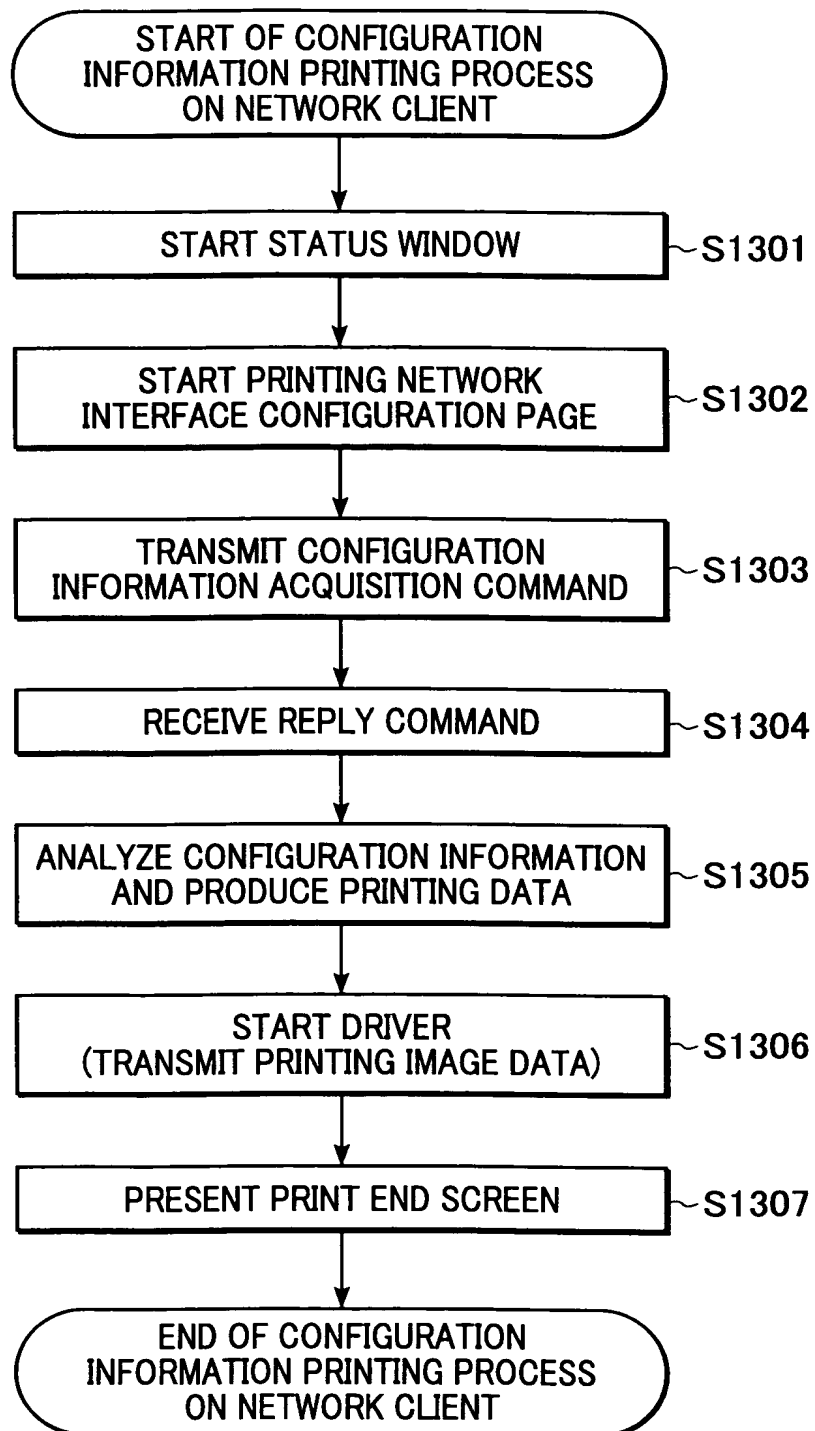


FIG. 14

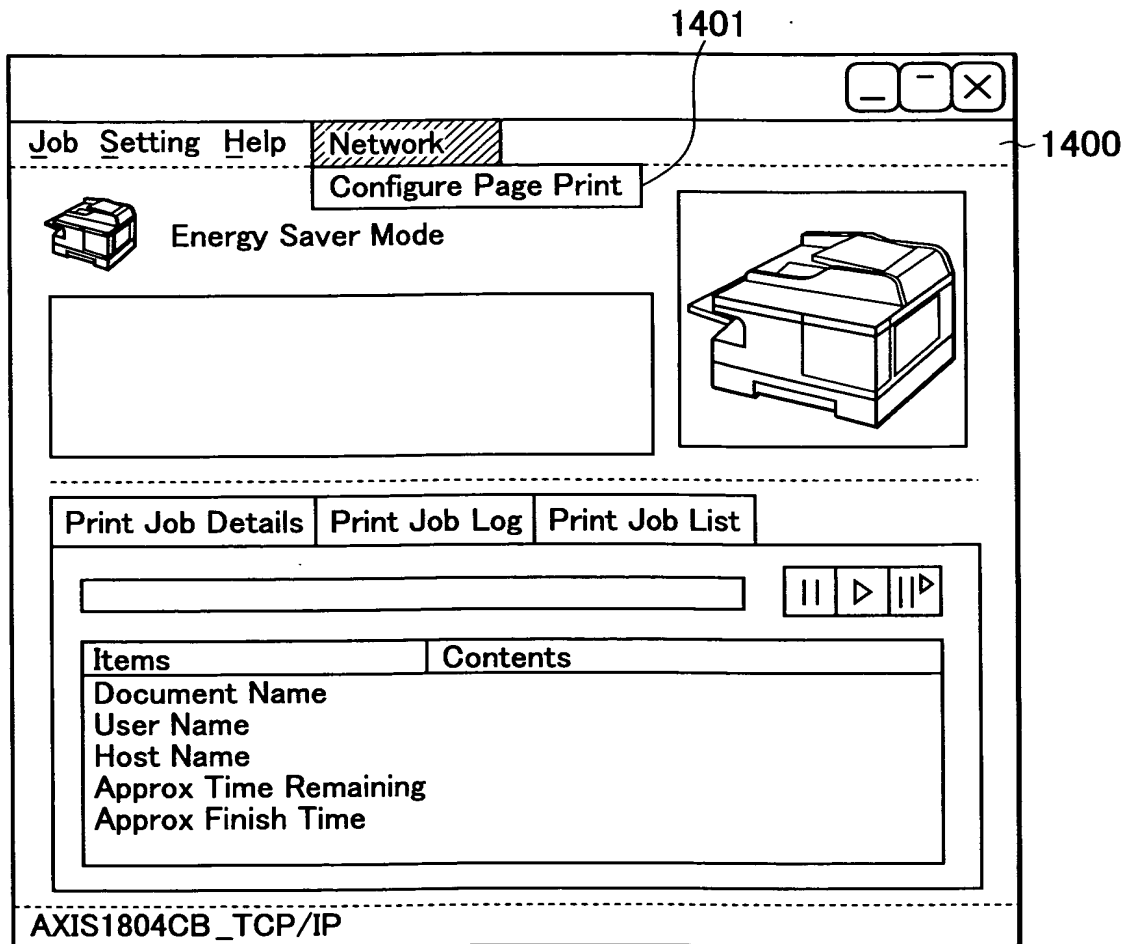


FIG. 15

